

SPE-3000 電動油壓泵浦 Hydraulic Electric Pump

- 省電易攜帶，操作簡便。
- 適用各類型操作場合。
- 提把與外殼一體成型。
- 均附有10呎線控裝置。
- 碳刷馬達，頻繁啟動耐操控。
- ※ Requires less energy, simple and easy to operate.
- ※ Suitable for any industrial application.
- ※ Handle and casing built together.
- ※ Equipped with 10ft remote line.
- ※ Carbon brushless motor, working frequently.

SPE-3000 **A** **1** **5** **1** **LT** **PG**

1. 閥門樣式

- A. 常閉內建三口二位電磁閥：前進 保持 回復
B. 常開線控自動洩壓：前進 回復
(馬達停止即洩壓，適用於衝床(打孔機)、壓鑄機或切割時使用)
C. 手動三口二位控制閥：前進 保持 手動回復
D. 手動四口三位控制閥：前進 保持 手動回復

2. 電壓/安培

- 1=115V/7.5A
2=230V/2.8A

3. Hz

- 5=50/60Hz

4. 相數

- 1=1ph

5. 油箱

- 無字樣=3000c.c PU油箱
LT=6000c.c 鐵製油箱
★ 亦可依客戶訂製

1 2 3 4 5 6

6. 配件

- P=壓力調整開關
G=壓力錶

1. Valve

- A. 3way/ 2position built-in Solenoid Valve :
Advance Hold Return
B. Remote Release Pressure :
Advance Return
(Ideal for punching, crimping and cutting)
C. 3way/ 2position Manual Valve :
Advance Hold Manual return
D. 4way/ 3position Manual Valve :
Advance Hold Manual return

2. Voltage/A

- 1=115V/7.5A
2=230V/2.8A

3. Hz

- 5=50/60Hz

4. Phase

- 1=1ph

5. Reservoir

- No word=3000c.c PU reservoir
LT=6000c.c Iron reservoir
★ User can order suitable reservoir.



SPE-3000C



LT=鐵製油箱
Iron reservoir



P=壓力調整開關
Pressure Adjust Switch





G=充油式壓力錶
Pressure Gauge

控制閥 Control Valve


單動液壓千斤頂可選用3口2位式電磁閥(內建)或手動控制閥。
建議型號：SPE-3000A(電磁閥)或SPE-3000C(手動閥)
A single-acting cylinder must be powered by a pump with a 3-way solenoid (built-in) or manual valve.
Compare Model : SPE-3000APS (solenoid) or SPE-3000CPS (manual)

雙動液壓千斤頂必須搭配具4口閥門的液壓泵浦。
建議型號：SPE-3000D
A double-acting cylinder must be powered by a pump with a 4-way valve. Compare Model : SPE-3000D

電動泵浦基本閥型 BASIC PUMP VALVE	適用油壓缸 Used with cylinder		閥作用 Valve Function		
	雙動	單動	前進	保持	回復
手動三口方向閥 Manual 3 way Valve	●	●	●	●	●
手動四口方向閥 Manual 4 way Valve	●	●	●	●	●



閥門樣式 Valve type

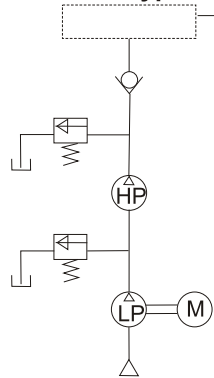

SPE-3000A

常閉內建三口二位電磁閥
Advance, Hold & Return

SPE-3000B

常開線控自動洩壓
Advance & Return

SPE-3000C

手動三口二位控制閥
Manual 3 way Valve

SPE-3000D

手動四口三位控制閥
Manual 4 way Valve

SPE-3000 Series

Reservoir Capacity:

3000-6000c.c

Flow at rated pressure:

4-0.4 L

Motor Size:

0.37kW(0.5 hp)

Maximum Operating Pressure:

700 bar

SPE-554TQJ 電動油壓泵浦


- 外部調壓。
- SPE-554TQ系列：適用於液壓扭力扳手工具(請參考95-98頁)。
- SPE-554TQJ系列：適用於各類液壓舉升工具。
- 3M(10ft)遙控線。
- 不銹鋼框架便於提運。

Hydraulic Electric Pump

- ※ External adjustable pressure regulator.
- ※ SPE-554TQ series: just use with Hydraulic Torque Wrench(see page77-84).
- ※ SPE-554TQJ series: just use with Hydraulic lift applications.
- ※ 3M(10 ft) remote motor control .
- ※ Stainless frame easy to carry.



SPE-554TQJ

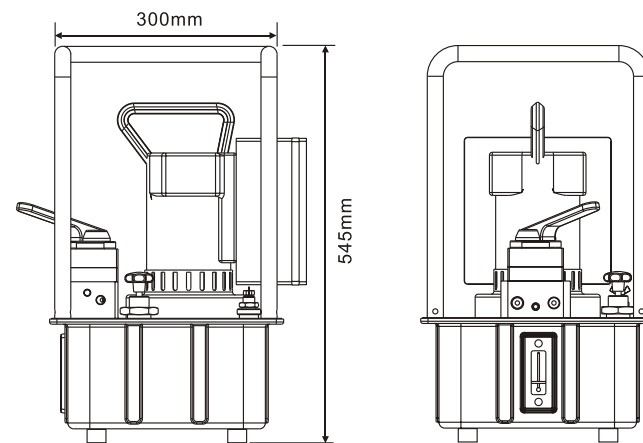

SPE-554TQJ Series

Reservoir Capacity:

8-20L

Flow at rated pressure:

11.3-0.9 L

Motor Size:

0.84kW (1-1/8 hp)

Maximum Operating Pressure:

700 bar

電泵型號選擇：Custom build your Electric Pump:

SPE-554 **TQJ** **1** **5** **1** **8** **4** **WO**

0 1 2 3 4 5 6

0.樣式
TQ=扭力扳手專用
TQJ=一般舉升適用

1. 電壓

- 1=115V
2=230V

2. Hz

- 5=50Hz / 60Hz

3. 相數

- 1=1ph

4. 油箱 (Lx0.26=gal)
8=8L(2.1gal)
20=20L(5.2gal)
★ 亦可依客戶訂製

5. 閥 (僅限TQJ型使用)
3=手動三口方向閥
4=手動四口方向閥

6. 選配

- W=輪子
O=冷卻系統

0. Type
TQ= just use in Torque Wrench
TQJ= using in lift applications

1. Voltage

- 1=115V
2=230V

2. Hz

- 5=50Hz / 60Hz

3. Phase

- 1=1ph


4. Reservoir (Lx0.26=gal)
8=8L(2.1gal)
20=20L(5.2gal)
★ User can order suitable reservoir.

5. Valve (just use in TQJ series)
3=Manual 3Way
4=Manual 4Way

6. Optional

- W=Castor wheel
O=Cool system

SPE-554 Pressure vs volume SPE-554 壓力與流量對照

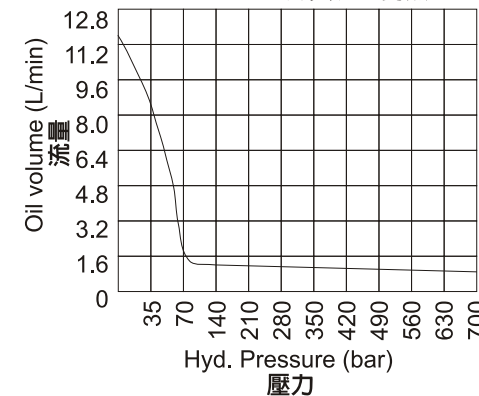

Model Number	Motor	Max. Pressure	Pressure Rating (psi)/(bar)		Output flow rate (L/min)		dBA at Idle and 700bar	Weight (include oil)	Dimension
型 號	馬達	最大使用壓力	輸出壓力		輸出油量		噪音值	重量 (含油) (kg)	外型尺寸 (mm)
	kW(hp)	(psi)/(bar)	1 st stage	2 nd stage	1 st stage	2 nd stage			
SPE-3000	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	16	250*270*400
SPE-3000 LT	0.37(0.5)	10,000(700)	200(14)	10,000(700)	4	0.4	85-90	24	300*350*460

Model Number	Rpm	dBA at Idle and 700bar 噪音值	Motor	Amp at 700bar	Flow rate @230VAC(L/min)				Oil tank	Usable oil	Weight (with oil)
型 號	轉速		馬達 kW (hp)	安培 (A)	流量				油箱 (L)	可用 油量 (L)	重量 (含油) (kg)
					0 (bar)	50 (bar)	350 (bar)	700 (bar)			
SPE-554	12000	80	0.84 (1-1/8)	25 /110V	11.3	7.1	1.2	0.9	8	7	32
				10.7 /230V							