


SQB 快速接頭

- 流量大、耐高壓。
- 各型號均附防塵蓋。


Hydraulic Couplers

※High flow rate and high pressure resistance.
 ※Dust cap include on all models.


SQB Series 最大使用壓力
 Maximum Operating Pressure
700 bar




SQB-1/4T




SQB-3/8J

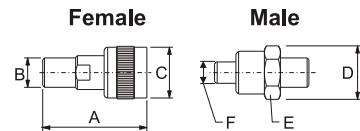

SQB-3/8T

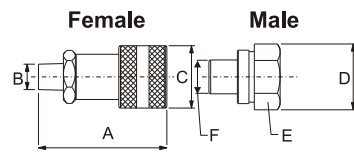

SQB-3/8U

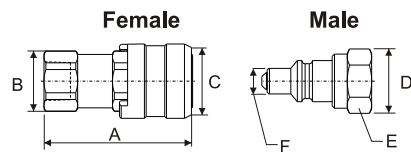

SQB-37

Model Number	Female Model	Male Model	外型尺寸 Dimension(mm)					
			A	B Thread type 螺牙樣式	C	D	E	F
整組型號	母接頭型號	公接頭型號						
SQB-1/4T	SQB-1/4TF	SQB-1/4TM	58.5	1/4"-18NPT	28.6	30.0	26.0	φ 10.0
SQB-3/8J	SQB-3/8JF	SQB-3/8JM	59.0	3/8"-19PT	30.5	28.0	24.0	φ 12.7(1/2")
SQB-3/8T	SQB-3/8TF	SQB-3/8TM	58.5	3/8"-18NPTF/PT	28.5	33.0	28.0	φ 12.0
SQB-3/8U	SQB-3/8UF	SQB-3/8UM	72.0	3/8"-18NPTF/PT	35.0	37.0	32.0	φ 19.05(3/4")
SQB-37	SQB-371F	SQB-372M	64.0	3/8"-18NPTF/PT	32.0	28.5	24H	φ 11.25(7/16")

XU 高壓油管

- 內管層：耐油性之合成橡膠配方。
- 外管層：耐油、耐磨、耐侯性之特殊橡膠配方。
- 適用溫度：-40°C~+93°C
- 長度加壓變化：-4%~+2%(在工作壓力下)
- 補強層：雙層鋼絲網。
- ◎ 使用溫度超過93°C時，會顯著降低夾合膠管的使用壽命。

High Pressure Hydraulic Hoses

※Tube : Oil resistan synthetic rubber.
 ※Cover : Oil, abrasion and weather aging resistant synthetic rubber.
 ※Temp.Range : -40°C~+93°C
 ※Max. change in length : -4%~+2%(under W.P.)
 ※Reinforcement : Two layers of steel wire braids.
 ◎ Operating temperature in excess of 93°C may materially reduce the service life of hose assembly.

油管型號選擇：How a hydraulic hose model number is built up:

X	U	2	-	1	.	6	M	3	N	M	3	N	M	-	S
1	2	3	4	5											
1.管徑尺寸 2=1/4英寸(6.4公釐) 3=3/8英寸(9.5公釐)	1. Tube dimension 2=1/4in(6.4mm) 3=3/8in(9.5mm)	2.油管長度 1呎≈0.3公尺 1公尺≈3.3呎	2. Length 1ft≈0.3meter 1meter≈3.3ft	3.一端尺寸 3NM=3/8NPTF(公牙) 3PM=3/8PTF(公牙)	3. End one 3NM=3/8NPTF(Male) 3PM=3/8PTF(Male)	4.另一端尺寸 3NM=3/8NPTF(公牙) 3NF=3/8NPTF(母牙) 3PM=3/8PTF(公牙) 3PF=3/8PTF(母牙)	4. End two 3NM=3/8NPTF(Male) 3NF=3/8NPTF(Female) 3PM=3/8PTF(Male) 3PF=3/8PTF(Female)	5.是否外附彈簧 S=外繞彈簧	5. Spring circle S=Spring circle S=外繞彈簧						



1/4"NPTF(Male)



1/4"NPTF(Female)



3/8"NPTF(Male)



3/8"NPTF(Female)

Model Number	Tube dimension (I.D)	Hose End Assemblies		Length	Work pressure	Broken pressure	Min. B.R.	Weight
		兩端尺寸						
型號	油管尺寸 (內徑) (in/mm)	End one	End two	長度 (m)	工作壓力 (bar)	爆破壓力 (bar)	最小彎曲半徑 (mm)	重量 (kg/m)
XU2-1.6M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	1.6	700	1400	100	0.4
XU2-1.8M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	1.8	700	1400	100	0.4
XU2-2M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	2	700	1400	100	0.4
XU2-3M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	3	700	1400	100	0.4
XU2-4M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	4	700	1400	100	0.4
XU2-5M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	5	700	1400	100	0.4
XU2-6M3NM3NM-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Male)	6	700	1400	100	0.4
XU2-1.6M3NM3NF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Female)	1.6	700	1400	100	0.4
XU2-2M3NM3NF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"NPTF(Female)	2	700	1400	100	0.4
XU2-3M3NM3PF-S	1/4 (6.4)	3/8"NPTF(Male)	3/8"PTF(Female)	3	700	1400	100	0.4
XU2-1.8M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	1.8	700	1400	100	0.4
XU2-2M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	2	700	1400	100	0.4
XU2-2.5M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	2.5	700	1400	100	0.4
XU2-3M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	3	700	1400	100	0.4
XU2-5.5M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	5.5	700	1400	100	0.4
XU2-6M3PM3PM-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Male)	6	700	1400	100	0.4
XU2-1.8M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	1.8	700	1400	100	0.4
XU2-2M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	2	700	1400	100	0.4
XU2-3M3PM3PF-S	1/4 (6.4)	3/8"PTF(Male)	3/8"PTF(Female)	3	700	1400	100	0.4
XU3-2M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	2	700	1400	100	0.4
XU3-3M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	3	700	1400	100	0.4
XU3-4M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	4	700	1400	100	0.4
XU3-5M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	5	700	1400	100	0.4
XU3-6M3NM3NM-S	3/8 (9.5)	3/8"NPTF(Male)	3/8"NPTF(Male)	6	700	1260	127	0.67
XU3-2M3PM3PF-S	3/8 (9.5)	3/8"PTF(Male)	3/8"PTF(Male)	2	700	1260	127	0.67
XU3-3M3PM3PM-S	3/8 (9.5)	3/8"PTF(Male)	3/8"PTF(Male)	3	700	1260	127	0.67